N2225, N2226, N2216, 2225EWHAI1, 2225RWHAI1

Flapperless EcoLogic® HET - 1.28 GPF



Flapperless EcoLogic® HET Toilet - 1.28 GPF

Features Innovative Tip-Bucket Technology

- High-efficiency 1.28 GPF toilet uses 63% less water than a standard 3.5 GPF toilet
- Flapperless design means no flapper to leak or replace
- Fluidmaster® fill valve
- Sweat-free tank
- Handle works on either side of tank
- EPA WaterSense® labeled
- Excellent MaP scores
- Limited Lifetime Warranty*

Niagara Flapperless® – 1.6 GPF





Niagara Flapperless® Toilet - 1.6 GPF

Features Innovative Tip-Bucket Technology

- Ultra low flow 1.6 GPF toilet uses 54% less water than a standard 3.5 GPF toilet
- Flapperless design means no flapper to leak or replace
- Fluidmaster® fill valve
- Sweat-free tank
- Handle works on either side of tank
- Excellent MaP scores
- Oversized tank and footprint covers unsightly wall or floor exposure
- Limited Lifetime Warranty*

Corporate HQ

4200 Diplomacy Road Fort Worth, TX 76155 USA Toll Free: 800.831.8383

Phone: 817.391.0800 Fax: 817.391.0801

Email: info@nccgreen.com

© 2013 Niagara Conservation

MSS225-05




Flapperless


N2225, N2226, N2216, 2225EWHAI1, 2225RWHAI1

SPECIFICATIONS

N2225E Elongated Bowl Specs




N2225R Round Bowl Specs



*Dimensions are subject to change

Overall Dimensions	Elongated: 16.5" high bowl Round: 16.5" high bowl
Footprint	20.5" x 10.25", Water Area 8" x 6"
Assembled Dimensions	Elongated: Height 31" Width 17 3/4" Depth 30" Round: Height 31" Width 17 3/4" Depth 28"
Rough In	10.5"-12"
Materials	Vitreous China – White Finish
Certifications	Meets or exceeds the following: ASME A112.19.2 /CSA B45.1, Watersense labeled



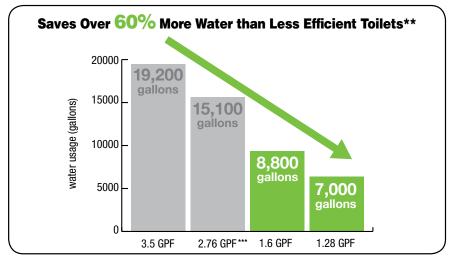

**Annual water savings for Flapperless 1.6 and 1.28 GPF based on a comparison to a 3.5 GPF toilet, 3-person household, 5 flushes per person/per day.

**** 2.76 GPF represents the average flush volume of a toilet in the United States

*LIMITED LIFETIME WARRANTY on vitreous china products. Toilet tank trim: fill valve and flush valve assembly and plumbing fittings are warrantied for a period of ten years to the purchaser from the date of purchase. For complete warranty details, call Niagara Conservation at 1-800-831-8383.

Corporate HQ

4200 Diplomacy Road Fort Worth, TX 76155 USA Toll Free: 800.831.8383

Phone: 817.391.0800 Fax: 817.391.0801

Email: info@nccgreen.com

© 2013 Niagara Conservation MSS225-05



For more information please visit: www.NiagaraConservation.com

apper ess

N2225, N2226, N2216, 2225EWHAI1, 2225RWHAI1

PACKAGING

2225E1WHAI1 (Elongated)



RETAIL PACKAGING

Item No	2225E1WHAI1
UPC Code	732291000222
Type of Packaging	High Quality White Corrugate with Litho Label
Dimensions	Width 18.0" Height 28.5" Depth 31.0"
Weight (Pkg.)	95 lbs

2225R1WHAI1 (Round)

RETAIL PACKAGING



	Adii14
Item No	2225R1WHAI1
UPC Code	732291000307
Type of Packaging	High Quality White Corrugate with Litho Label
Dimensions	Width 18.0" Height 28.5" Depth 31.0"
Weight (Pkg.)	95 lbs

N2225T (Tank) - EcoLogic HET

Use with N2225E-B Bowl or N2225RB Bowl



RETAIL PACKAGING

Item No	N2225T
UPC Code	732291222532
Type of Packaging	Kraft Corrugated
Dimensions	Width 10.5" Height 15.75" Depth 18.5"
Weight (Pkg.)	37 lbs

N2225E-B (Elongated Bowl), N2225RB (Round Bowl)


RETAIL PACKAGING



Item No	N2225E-B
UPC Code	732291222556
Dimensions	H-17.5" W-15.5" D-29.75"
Item No	N2225RB
UPC Code	732291222525
Dimensions	W-15.5" H-17.5" D-27.5"

Type of Pkg	Kraft Corrugated
Weight (Pkg.)	53 lbs

N2216T (Tank)





RETAIL PACKAGING

Item No	N2216T
UPC Code	732291221627
Type of Packaging	Kraft Corrugated
Dimensions	Width 10.5" Height 15.75" Depth 21.75"
Weight (Pkg.)	43 lbs

N2216B (Round Bowl)

RETAIL PACKAGING



Item No	N2216B
UPC Code	732291221610
Dimensions	W-15.5" H-16" D-27.5"
Type of Pkg	Kraft Corrugated

Type of Pkg	Kraft Corrugated
Weight (Pkg.)	49 lbs

Corporate HQ

4200 Diplomacy Road Fort Worth, TX 76155 USA Toll Free: 800.831.8383

Phone: 817.391.0800 Fax: 817.391.0801

Email: info@nccgreen.com

© 2013 Niagara Conservation

MSS225-05

