



NEMA Receptacle Configuration.



5-15P

For Compatibility, Match to NEMA Plug.

## Window Air Conditioner Cooling Only


Available in 5K BTU

Fits Standard Double Hung Windows

### Specifications

Voltage	115 VAC
Frequency	60 Hz
Plug	Prewired LCDI NEMA Type
Control Panel	Manual Control Knobs
Fan Speeds	High & Low
Refrigerant	Eco-Friendly R-410A
Filter	Reusable
Directional Air Louvers	2-Way Manual Control
Installation Hardware	Included

All Dimensions are Nominal.

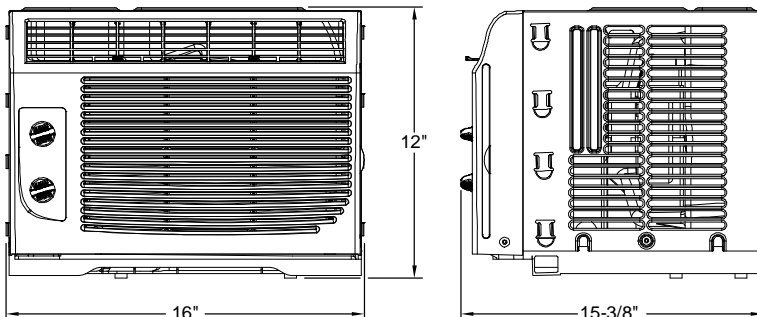

### Mode Selection

Choose between fan & cooling operations.

### Optimal Conditions for Cooling

- Outdoor Temperature: 64-109°F
- Indoor Temperature: 62-90°F

### Certifications

- C-UL-US

### Warranties

- 1-Year Limited Warranty on Entire Unit
- 5-Year Limited Warranty on Sealed System

Garrison Model #	247793
<b>Cooling Performance</b>	
Capacity (BTU/Hr)	5,000
Current	5.4 A
Input Power	446 W
Refrigerant Charge Amount	10.58 Oz.
Design Pressure (High/Low)	520/300 PSIG
<b>General Performance</b>	
EER	11.1
Airflow CFM (H/ML)	163/111
Room Area	100-150 Ft. <sup>2</sup>
Max. Indoor Sound Level	55 dBA
Dehumidification Rate	1.3 Pt./Hr
<b>Electrical Specifications</b>	
Voltage	115 VAC
Frequency	60 Hz.
NEMA Plug Configuration	5-15P
Power Cord Length	6 Ft.
<b>Dimensions</b>	
Net Weight	40 Lbs.
Window Opening Width	23" to 36"
Window Opening Height	13" Min.

